
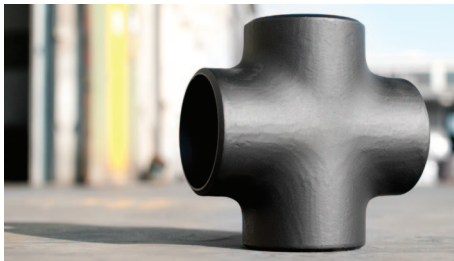


Croci

Crosses




Croci

Crosses

Tolleranze dimensionali: pag. 81
 Pezzi a croce ridotti o con dimensioni
 o spessori particolari: a richiesta (-)

Dimensional tolerances: pag. 81
 Reducing crosses or crosses with special
 thickness and size: on application (-)

D [mm]	M [mm]	NPS	S = SCHEDULE												
			STD	XS	10	20	30	40	60	80	100	120	140	160	XXS
21,3	25,0	1/2"	2,77	3,73	—	—	—	2,77	—	3,73	—	—	—	4,75	7,47
26,7	28,5	3/4"	2,87	3,91	—	—	—	2,87	—	3,91	—	—	—	5,54	7,82
33,4	38,0	1"	3,38	4,55	—	—	—	3,38	—	4,55	—	—	—	6,35	9,09
42,2	48,0	1 1/4"	3,56	4,85	—	—	—	3,56	—	4,85	—	—	—	6,35	9,70
48,3	57,0	1 1/2"	3,68	5,08	—	—	3,18	3,68	—	5,08	—	—	—	7,14	10,16
60,3	64,0	2"	3,91	5,54	—	—	3,18	3,91	—	5,54	—	—	—	8,74	11,07
73,0	76,0	2 1/2"	5,16	7,01	—	—	4,78	5,16	—	7,01	—	—	—	9,52	14,02
88,9	86,0	3"	5,49	7,62	—	—	4,78	5,49	—	7,62	—	—	—	11,12	15,24
101,6	95,0	3 1/2"	5,74	8,08	—	—	4,78	5,74	—	8,08	—	—	—	—	—
114,3	105,0	4"	6,02	8,56	—	—	4,78	6,02	—	8,56	—	11,12	—	13,49	17,12
141,3	124,0	5"	6,55	9,52	—	—	—	6,55	—	9,52	—	12,70	—	15,87	19,05
168,3	143,0	6"	7,11	10,97	—	—	—	7,11	—	10,97	—	14,27	—	18,24	21,94
219,1	178,0	8"	8,18	12,70	—	6,35	7,04	8,18	10,30	12,70	15,06	18,24	20,62	23,01	22,22
273,0	216,0	10"	9,27	12,70	—	6,35	7,80	9,27	12,70	15,06	18,24	21,41	25,40	28,57	25,40
323,8	254,0	12"	9,52	12,70	—	6,35	8,38	10,31	14,30	17,45	21,41	25,40	28,57	33,32	25,40
355,6	279,0	14"	9,52	12,70	6,35	7,92	9,52	11,12	15,10	19,05	23,80	27,76	31,75	35,71	—
406,4	305,0	16"	9,52	12,70	6,35	7,92	9,52	12,70	16,70	21,41	26,19	30,94	36,52	40,46	—
457,2	343,0	18"	9,52	12,70	6,35	7,92	11,12	14,27	19,05	23,80	29,36	34,92	39,67	45,24	—
508,0	381,0	20"	9,52	12,70	6,35	9,52	12,70	15,06	20,60	26,19	32,54	38,10	44,45	49,99	—
558,8	419,0	22"	9,52	12,70	6,35	9,52	12,70	—	22,23	28,58	34,93	41,28	47,63	53,98	—
609,6	431,8	24"	9,52	12,70	6,35	9,52	14,25	17,45	24,60	30,94	38,89	46,02	52,37	59,51	—
660,4	495,0	26"	9,52	12,70	7,92	12,70	—	—	—	—	—	—	—	—	—
711,2	521,0	28"	9,52	12,70	7,92	12,70	15,88	—	—	—	—	—	—	—	—
762,0	559,0	30"	9,52	12,70	7,92	12,70	15,88	—	—	—	—	—	—	—	—
812,8	597,0	32"	9,52	12,70	7,92	12,70	15,88	17,48	—	—	—	—	—	—	—
863,6	635,0	34"	9,52	12,70	7,92	12,70	15,88	17,48	—	—	—	—	—	—	—
914,4	673,0	36"	9,52	12,70	7,92	12,70	15,88	19,05	—	—	—	—	—	—	—
965,2	711,0	38"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1016,0	749,0	40"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1066,8	711,0	42"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1118,0	762,0	44"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1168,4	800,0	46"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1219,2	838,0	48"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—



Pesi [kg]

Weights

Tolleranze dimensionali: pag. 81
 Pezzi a croce ridotti o con dimensioni
 o spessori particolari: a richiesta (-)

Dimensional tolerances: pag. 81
 Reducing crosses or crosses with special
 thickness and size: on application (-)

D [mm]	M [mm]	NPS	S = SCHEDULE												
			STD	XS	10	20	30	40	60	80	100	120	140	160	XXS
21,3	25,0	1/2"	0,13	0,20	-	-	-	0,13	-	0,20	-	-	-	0,32	0,40
26,7	28,5	3/4"	0,20	0,30	-	-	-	0,20	-	0,30	-	-	-	0,45	0,60
33,4	38,0	1"	0,47	0,61	-	-	-	0,47	-	0,61	-	-	-	1,04	1,30
42,2	48,0	1 1/4"	0,65	0,91	-	-	-	0,65	-	0,91	-	-	-	1,30	1,56
48,3	57,0	1 1/2"	0,91	1,17	-	-	-	0,91	-	1,17	-	-	-	1,95	2,35
60,3	64,0	2"	1,30	1,85	-	-	-	1,30	-	1,85	-	-	-	3,25	3,90
73,0	76,0	2 1/2"	2,35	2,90	-	-	-	2,35	-	2,90	-	-	-	5,20	7,80
88,9	86,0	3"	3,50	3,90	-	-	-	3,50	-	3,90	-	-	-	7,80	10,40
101,6	95,0	3 1/2"	4,60	6,35	-	-	-	4,60	-	6,35	-	-	-	10,40	14,30
114,3	105,0	4"	5,70	8,30	-	-	-	5,70	-	8,30	-	-	-	13,00	16,90
141,3	124,0	5"	9,10	12,00	-	-	-	9,10	-	12,00	-	-	-	26,00	31,20
168,3	143,0	6"	13,00	19,50	-	-	-	13,00	-	19,50	-	-	-	32,50	39,00
219,1	178,0	8"	24,70	37,60	-	-	-	24,70	-	37,60	-	-	-	67,60	67,60
273,0	216,0	10"	39,00	62,00	-	-	-	39,00	-	-	-	-	-	111,0	-
323,8	254,0	12"	61,00	101,0	-	-	-	66,00	-	-	-	-	-	182,0	-
355,6	279,0	14"	78,00	124,0	-	-	-	-	-	-	-	-	-	-	-
406,4	305,0	16"	97,00	134,0	-	-	-	-	-	-	-	-	-	-	-
457,2	343,0	18"	136,0	163,0	-	-	-	-	-	-	-	-	-	-	-
508,0	381,0	20"	163,0	208,0	-	-	-	-	-	-	-	-	-	-	-
558,8	419,0	22"	189,0	241,0	-	-	-	-	-	-	-	-	-	-	-
609,6	431,8	24"	215,0	267,0	-	-	-	-	-	-	-	-	-	-	-
660,4	495,0	26"	-	-	-	-	-	-	-	-	-	-	-	-	-
711,2	521,0	28"	-	-	-	-	-	-	-	-	-	-	-	-	-
762,0	559,0	30"	-	-	-	-	-	-	-	-	-	-	-	-	-
812,8	597,0	32"	-	-	-	-	-	-	-	-	-	-	-	-	-
863,6	635,0	34"	-	-	-	-	-	-	-	-	-	-	-	-	-
914,4	673,0	36"	-	-	-	-	-	-	-	-	-	-	-	-	-
965,2	711,0	38"	-	-	-	-	-	-	-	-	-	-	-	-	-
1016,0	749,0	40"	-	-	-	-	-	-	-	-	-	-	-	-	-
1066,8	711,0	42"	-	-	-	-	-	-	-	-	-	-	-	-	-
1118,0	762,0	44"	-	-	-	-	-	-	-	-	-	-	-	-	-
1168,4	800,0	46"	-	-	-	-	-	-	-	-	-	-	-	-	-
1219,2	838,0	48"	-	-	-	-	-	-	-	-	-	-	-	-	-